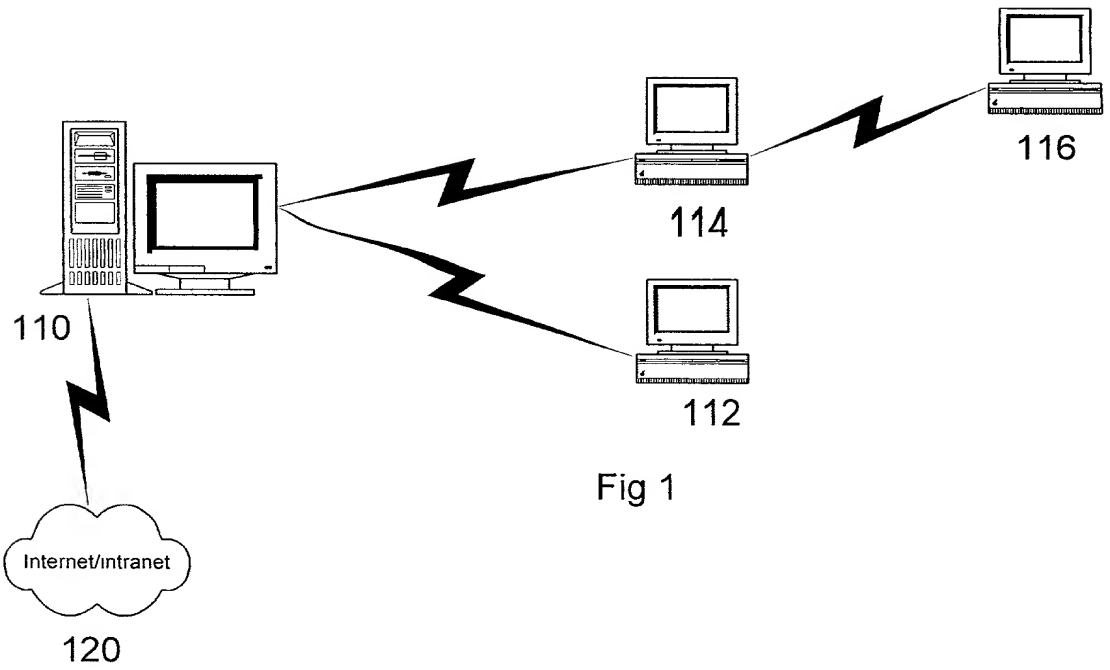
116
114
110
112
Internet/intranet
120

Fig 1

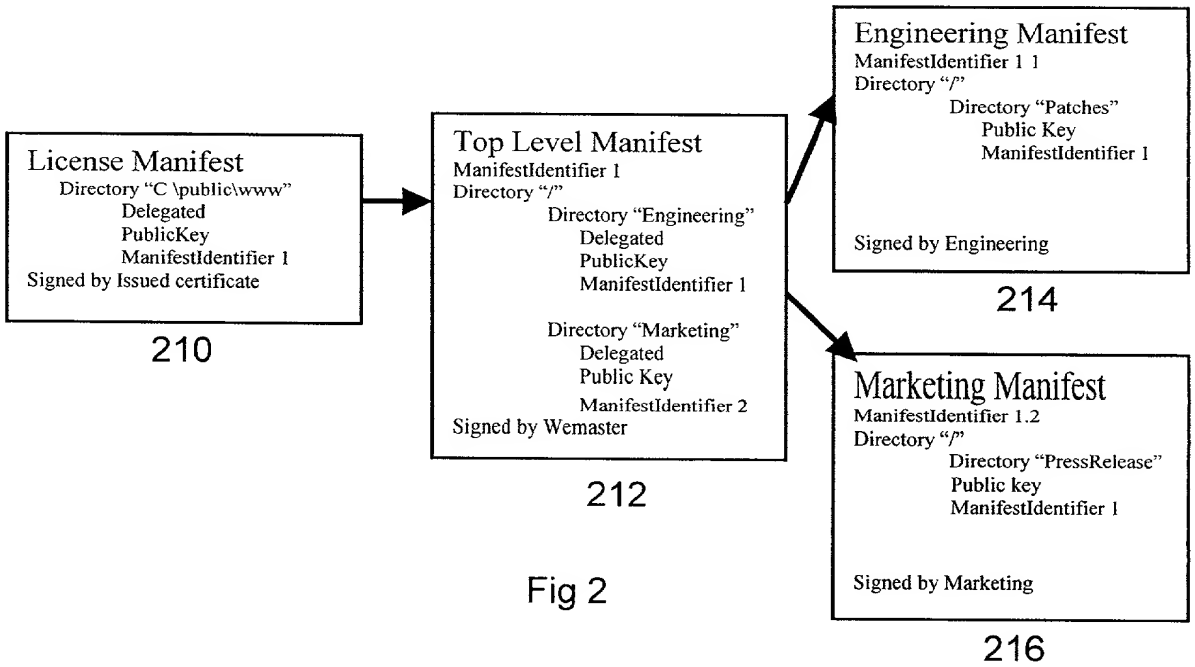
License Manifest
Directory "C \public\www"
Delegated
PublicKey
ManifestIdentifier 1
Signed by Issued certificate
210
Top Level Manifest
ManifestIdentifier 1
Directory "/"
Directory "Engineering"
Delegated
PublicKey
ManifestIdentifier 1
Directory "Marketing"
Delegated
Public Key
ManifestIdentifier 2
Signed by Wemaster
212
Engineering Manifest
ManifestIdentifier 1 1
Directory "/"
Directory "Patches"
Public Key
ManifestIdentifier 1
Signed by Engineering
214
Marketing Manifest
ManifestIdentifier 1.2
Directory "/"
Directory "PressRelease"
Public key
ManifestIdentifier 1
Signed by Marketing
216

Fig 2

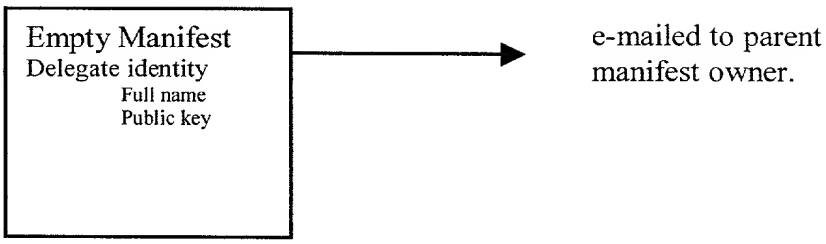

Figure 3

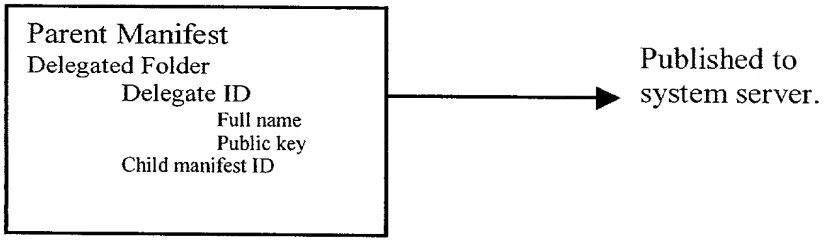

Figure 4

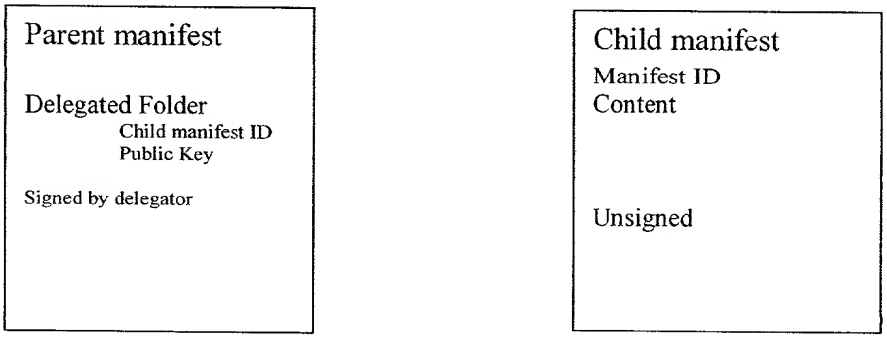

Figure 5

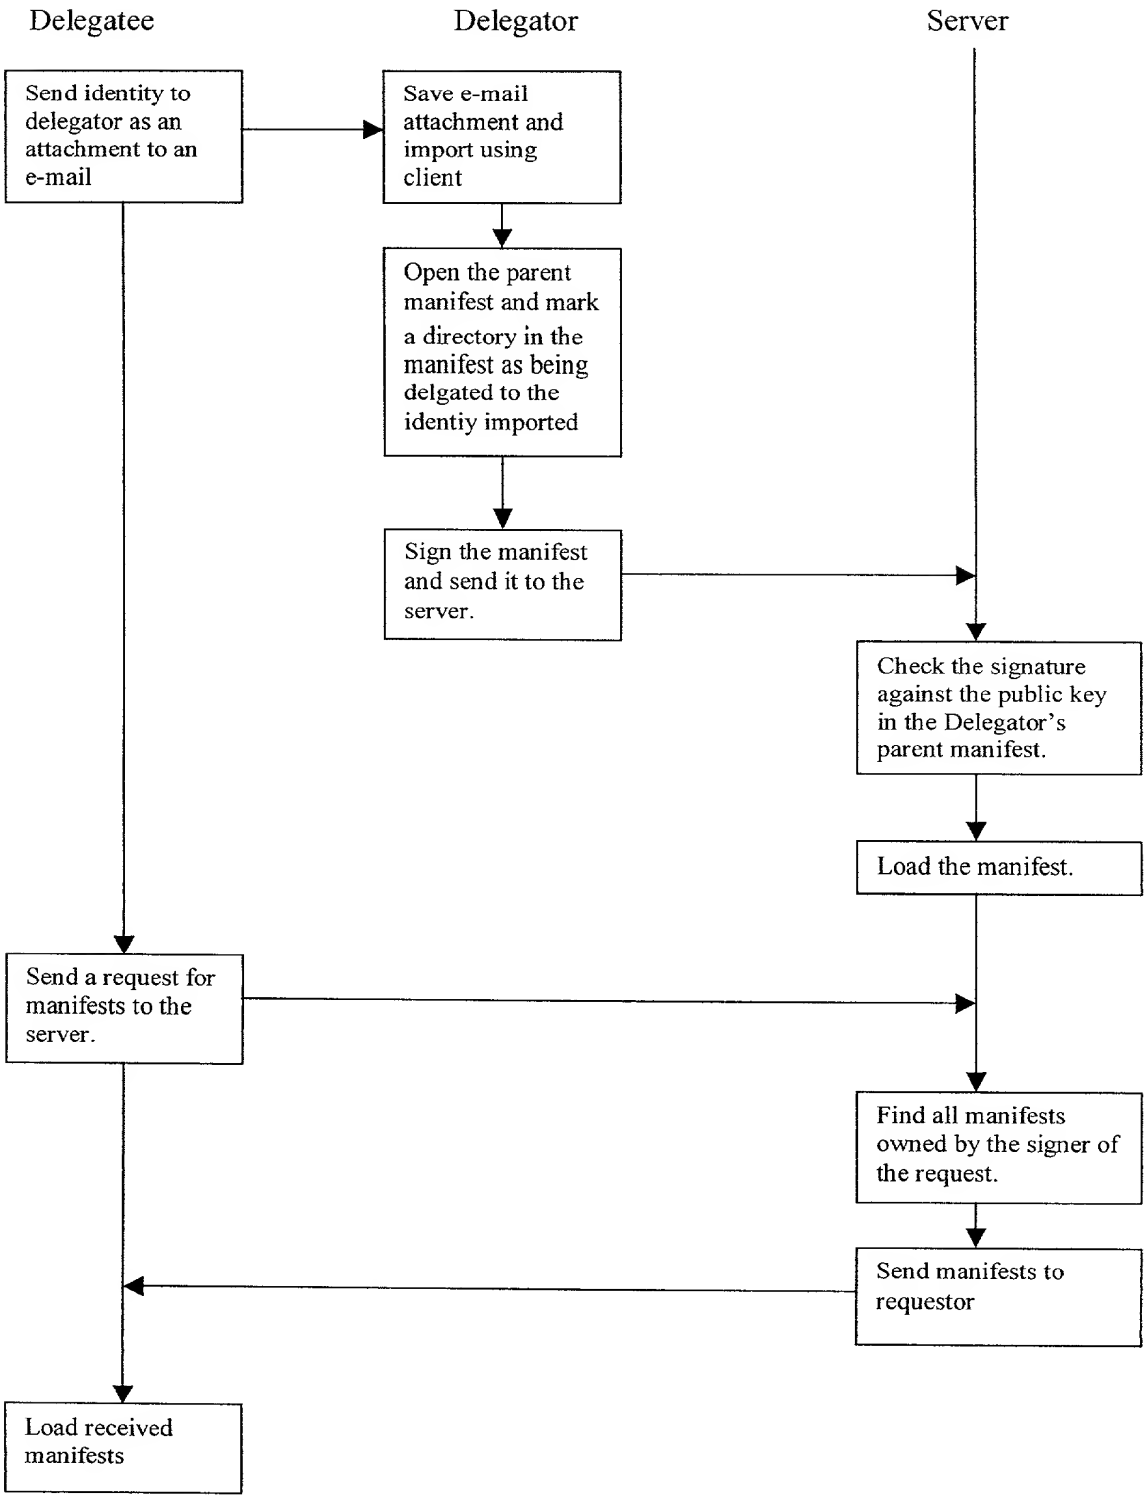
Delegatee
Delegator
Server
Send identity to delegator as an attachment to an e-mail
Save e-mail attachment and import using client
Open the parent manifest and mark a directory in the manifest as being delgated to the identiy imported
Sign the manifest and send it to the server.
Check the signature against the public key in the Delegator's parent manifest.
Load the manifest.
Send a request for manifests to the server.
Find all manifests owned by the signer of the request.
Send manifests to requestor
Load received manifests

Fig 6